



## ◆ Main Specifications

Working Voltage	24 (V DC)
DC Resistance	10 ( $\Omega$ )
External Resistance	1.5 ( $\Omega$ ) <6 (W) or more>
Duty Cycle	8 (%) or less
Max ON Time	50 (ms)
Coil Saturation Temperature Rise $\Delta\theta_s$ (at 20°C)	$\Delta\theta_s \doteq 17 \times W$ (°C) $K \doteq 17$ (°C/watt)
Temperature Rise Time Constant $\tau$	4.5 (minutes)
Heat-Resistant Class	Class E (120°C)
Insulation Resistance	500V DC MEGA, 100 M $\Omega$ or more
Dielectric Strength	1000V AC, 50/60 Hz, 1 minute
Mass	45 (g)
Non-Excited Holding Force	3 (N) or more
Response Speed *1	9 (ms)

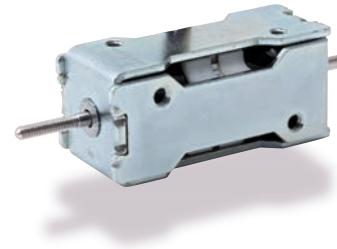

\* 1: measurement conditions: measured by Takano Co. in a standard testing environment, with no load, shaft in a horizontal position, applied voltage 24V DC.

## ◆ Attractive Force Data

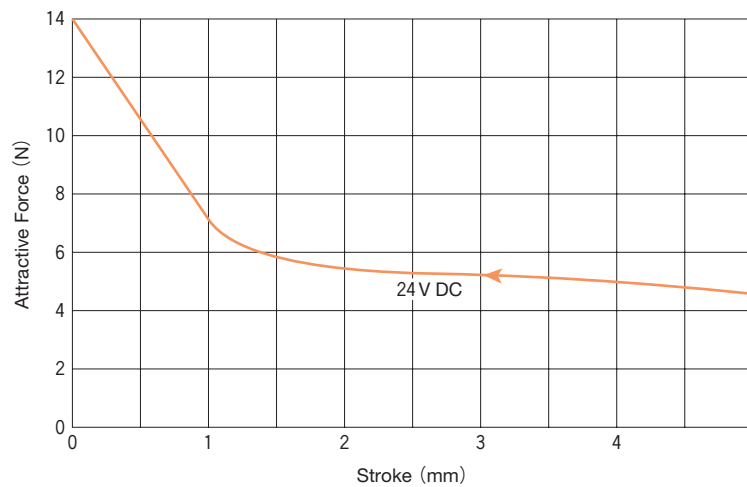

## ◆ External Dimensions (mm)

